

Installation Instructions

1. To assure proper installation measure the voltage on each phase and insure the correct device is installed.
2. Turn off power to circuit where surge protector is to be installed.
3. Mount device so as to keep conductor length as short as possible. Cut wires to shortest functional length and connect to circuit per wiring diagram (avoiding sharp bends or looping).
4. Reinstall covers, restore power and confirm diagnostic LED is illuminated.

Diagnostic Operation

- LED ON = Normal operation
- LED OFF= Fault, check voltage & connections. If OK, replace unit.

***All surge protection devices require good ground connection for effective operation**




Scan the QR code or visit pspproducts.com to learn more about this product's warranty.


8618 Phoenix Drive, Manassas, VA 20110
703.687.4057 | sales@pspproducts.com

AC Network	
Nominal Voltage	120VAC
Max. Operating Voltage (MCOV)	150VAC
Max. Discharge Current (Imax)	50kA

Technical Assistance
Call: 703-687-4057

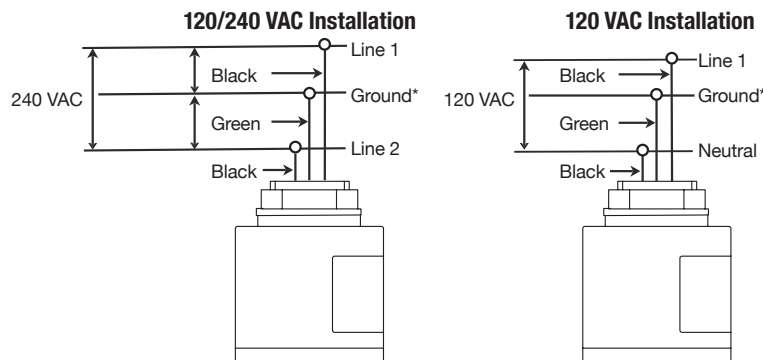

Disconnect

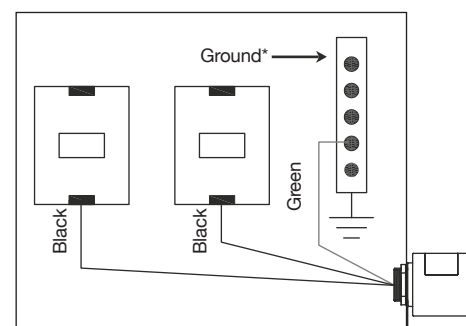

Installation Instructions

1. To assure proper installation measure the voltage on each phase and insure the correct device is installed.
2. Turn off power to circuit where surge protector is to be installed.
3. Mount device so as to keep conductor length as short as possible. Cut wires to shortest functional length and connect to circuit per wiring diagram (avoiding sharp bends or looping).
4. Reinstall covers, restore power and confirm diagnostic LED is illuminated.

Diagnostic Operation

- LED ON = Normal operation
- LED OFF= Fault, check voltage & connections. If OK, replace unit.

***All surge protection devices require good ground connection for effective operation**




Scan the QR code or visit pspproducts.com to learn more about this product's warranty.

8618 Phoenix Drive, Manassas, VA 20110
703.687.4057 | sales@pspproducts.com

AC Network	
Nominal Voltage	120VAC
Max. Operating Voltage (MCOV)	150VAC
Max. Discharge Current (Imax)	50kA

Technical Assistance
Call: 703-687-4057

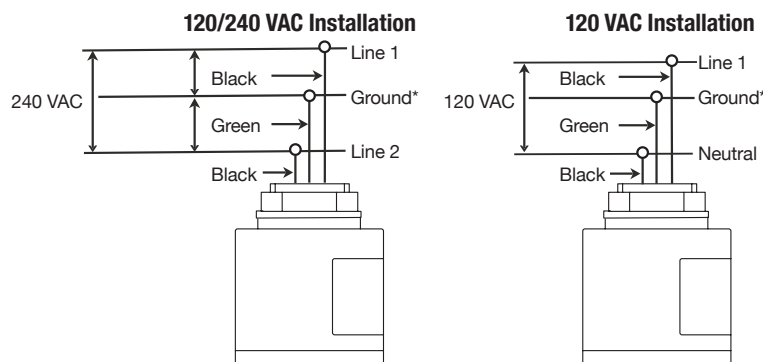

Disconnect

